


Vane for Current meter Aquadopp



(300-6000m)

The Vane for Current meter Aquadopp (VCA) has been designed as the perfect couple for your Nortek single point or current profiler Aquadopp. It is a free rotating, non magnetic, robust clamping structure that will match with most of your oceanographic mooring requirements. The VCA is offered with as many flavours as the Aquadopp family of products: shallow, medium or deep waters, with or without extra sensors, single or double battery canister, side-looking or symmetrical sensor head, etc. If you have any specific requirement, please, do not hesitate to make us know and we will try to find a tailor made solution for you.

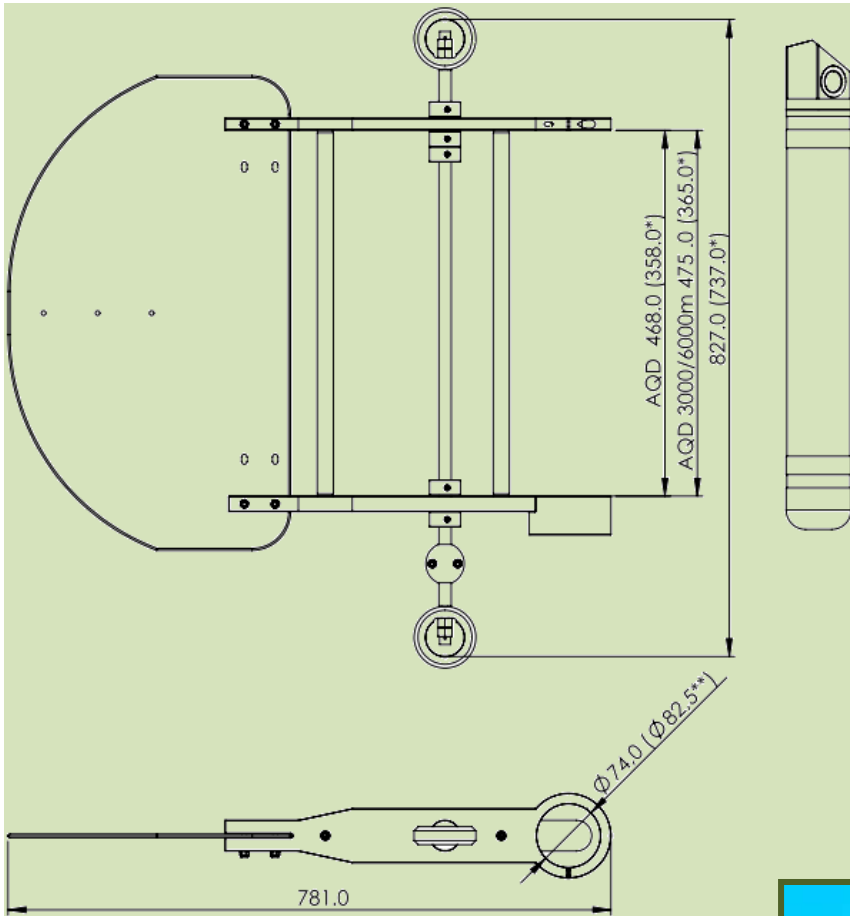

*With single battery pack.
**Deep water version.

Do not deduce dimensions directly from the plan.
All dimensions in mm.

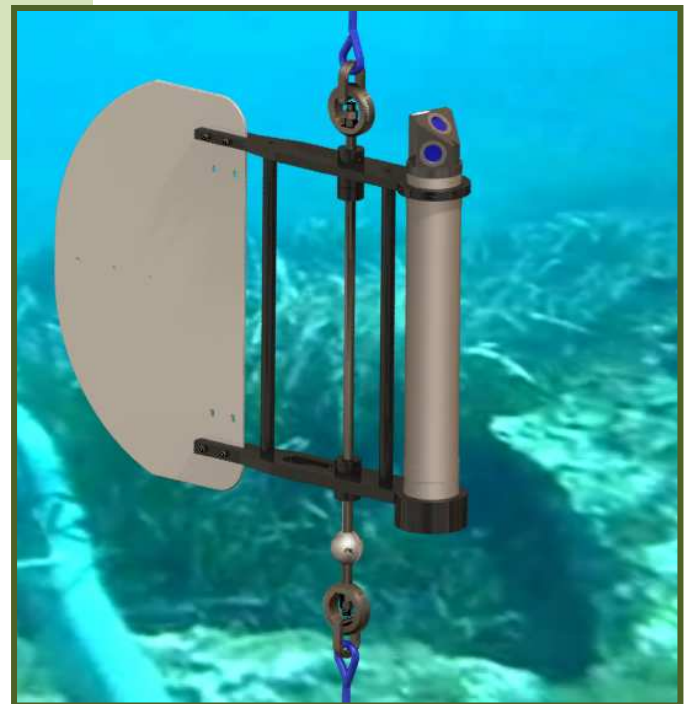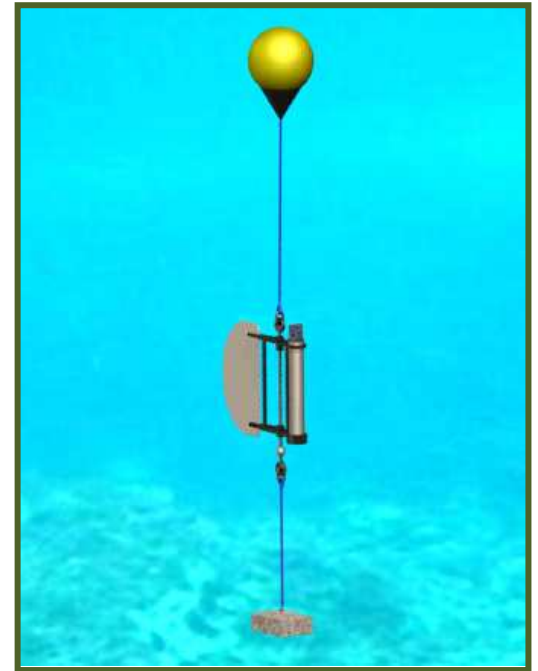

Technical Specifications

Materials	
Standard model	Delrin ®, AISI 316, PVC and zinc
Environmental	
Operating temperature	-4°C to 40°C
Storage temperature	-20°C to 60°C
Shock and vibration	IEC 721-3-2
Pressure rating	0-6000 m
Antifouling Paint	
May be applied to all surfaces	
Dimensions	
Whole	Inquire
Approx. weight in air	Depends on the Aquadopp
Approx. weight in water	Depends on the Aquadopp
Options	
Balancing ballast	Available
Additional sensors support	Available

INNOVA
oceanografía litoral

INNOVA oceanografía litoral S.L.
Ronda Bellesguard, 8 Local Dcha
08203 Sabadell, Barcelona, Spain
Tel: +34 937 205 364
Fax: +34 937 205 101



www.oceanografialitoral.com

E-mail: innova@oceanografialitoral.com